

Hall Pyke



Membrane Filtration

DN66T

The SMART choice for filtration

DN66T[®] Filter Cartridges

Nylon 66 Membrane • Sterile Liquid Filter

DN66T[®] Filter Cartridges are composed of an inherently hydrophilic Nylon 66 membrane. It's specifically designed for bio-burden reduction and the final filtration of a wide range of pharmaceutical and biological solutions. A modified Nylon 66 membrane with positive-charged Zeta particles is available, which provides enhanced retention of fine particles such as endotoxins.

Features and Benefits

- Intrinsically water wettability
- Modified DN66T filter removes endotoxins through the formation of positive-charged Zeta particles
- High bubble point ensures a more reliable retention efficiency
- Low pressure drops and high flow rates
- Longer service life

Quality Standards

- Integrity Test correlates to ASTM F838-05 Bacterial Challenge Test (BCT)
- Each filter is individually Integrity Tested prior to leaving the factory
- Each filter is Fully Traceable with a unique serial number
- Designed, developed and manufactured in compliance with ISO9001
- Full Regulatory Compliance with the following:
 - 21CFR.210.3(b)(5)(6), 211.72 for Non-Fiber Release
 - Endotoxins: <0.25EU/ml/10inch filter
 - USP <88> Plastic Class VI-121°C
 - FDA 21 CFR177-182 & EU 1935/2004/EC

Typical Application

- Buffer Solutions
- WFI
- LVP & Antibiotics

Sterile Filtration

Bio-burden Reduction

Pre-Filtration

All-Fluorine Filters

Capsule Filters



Materials of Construction

Filter Media	Hydrophilic Nylon 66 Membrane
Support	PET
Cage/Core/End Caps	Polypropylene

Operating Conditions

Max. Temperature	80°C
Max. Differential Pressure	4.0 bar / 21°C(forward) 2.4 bar / 80°C(forward)
Effective Filtration Area	0.58m ² / Φ 68-10 inch


Sterilization

Inline Steam Sterilization	up to 10 cycles (121°C for 30min@30kPa per cycle)
----------------------------	---

Integrity Test Data

Bubble Point	BP : ≥0.38 MPa (water), 0.1 μm +0.1 μm
	BP : ≥0.34 MPa (water), 0.22 μm +0.22 μm
	BP : ≥0.30 MPa (water), 0.45 μm +0.22 μm

Flow Rate Characteristics

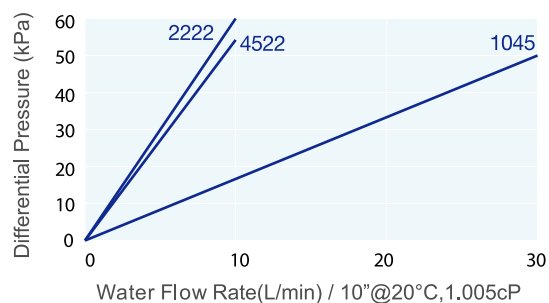

Ordering Information

DN66T	Removal Ratings	End Cap	Nominal Length	Seal Material	-P
	1010 =0,1+0,1μm	HSF=226 /Fin (PBT Insert)	05=5"	S=Silicone	
	2222 =0,22+0,22μm	HSC=226 /Flat (PBT Insert)	10=10"	E=EPDM	
	4545 =0,45+0,45μm	HTF=222 /Fin (PBT Insert)	20=20"	V=Viton	
	1045 =1,0+0,45μm	HTC=222 /Flat (PBT Insert)	30=30"		
		DOE=Double Open End	40=40"		

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie