

Hall Pyke



Dust Filter Cartridges
Dirty Side
Removal - Oval

The SMART choice for filtration

DIRTY SIDE REMOVAL-OVAL TYPE **CODD**

With outer mesh or strap
OPEN/OPEN

DIRTY SIDE REMOVAL


- > Filter cartridge for dust applications
- > Can be equipped with Nordic Air Filtration's media selection. See our Industrial Filtration media guide
- > Gasket according to application
- > Glue bead separator added to ensure flawless pleat distribution
- > Optional: Electrostatic conductive enhancement for ATEX environment

PART NUMBER

Example:

CODD XXX XXXX XXX XX W

cartridge type	┌	└	┌	└	┌	└
number/diameter of flange. mm	┌	└	┌	└	┌	└
height of filter. mm	┌	└	┌	└	┌	└
type of filter media	┌	└	┌	└	┌	└
filter media area. m ²	┌	└	┌	└	┌	└
technology notes (optional)	┌	└	┌	└	┌	└

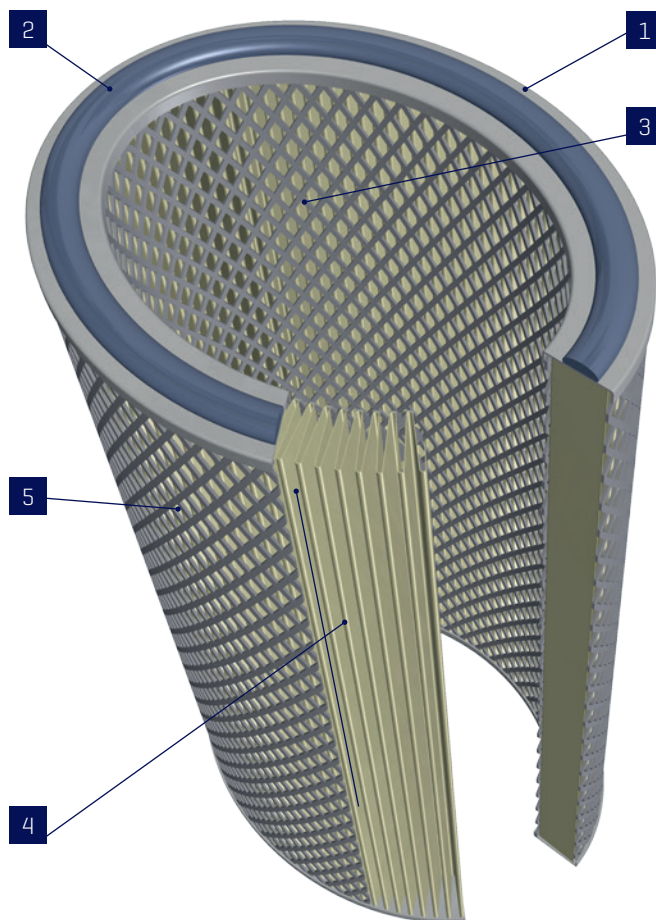


- 1 TOP/BOTTOM CAP**
Standard: Galvanized
- 2 GASKET**
Standard: Foamed gasket
Alternative: Silicone gasket
- 3 INNER MESH**
Standard: Galvanized
- 4 FILTER MEDIA**
Can be equipped with Nordic Air Filtration's filter media selection. Glue bead separator added to ensure flawless pleat distribution
- 5 OUTSIDE STRAP**
Standard: Outside mesh
Alternative: Glued strap

Errors and omissions excepted.

Revised: April 2016


DIRTY SIDE REMOVAL-OVAL TYPE **CODD** OPEN/OPEN With outer mesh or strap

DESIGN & DIMENSIONS

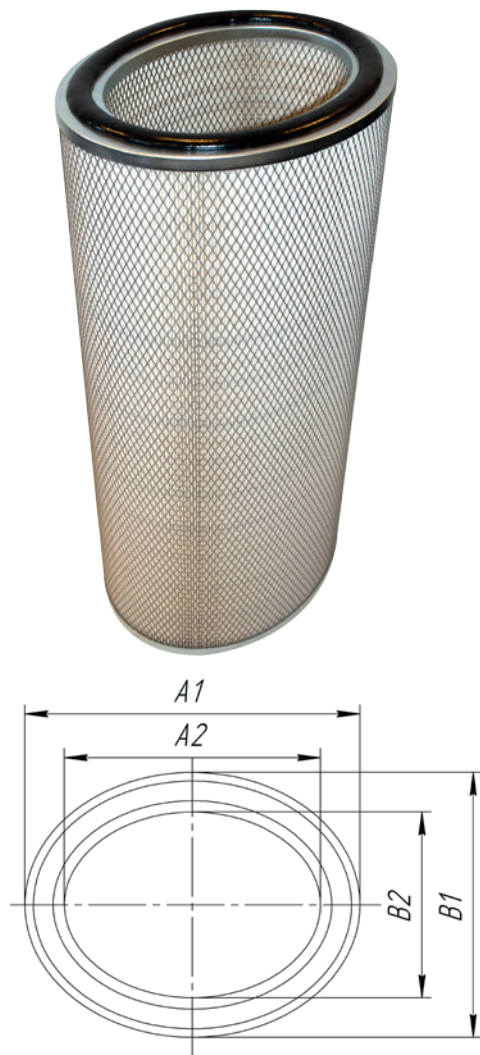


GASKET

GW	GH
21 MM	8 MM



CARTRIDGE

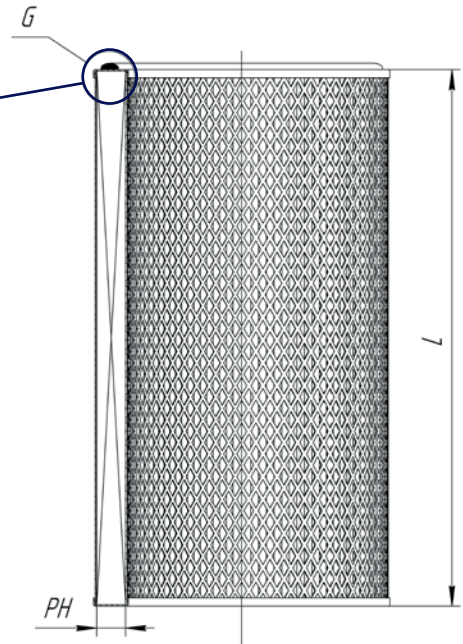

Specifications	Standard dimensions / mm		
		mm	Inches
Top cap outer diameter	OD	288 (B1) / 365 (A1)	11.34 (B1) / 14.37 (A1)
Top cap inner diameter	ID	202 (B2) / 279 (A2)	7.95 (B2) / 10.98 (A2)
Pleat height	PH	36	1.42
Cartridge length	L	660	26.00

Customized dimensions available.

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie