

Hall Pyke



Dust Filter Cartridges

Jet Cartridge

The SMART choice for filtration

JET CARTRIDGE

WITH 3-LUG - OPEN/CLOSE

TYPE **CJ**
3-lug version

DIRTY OR CLEAN SIDE REMOVAL


- > Filter cartridge for dust applications
- > Can be equipped with Nordic Air Filtration's media selection. See our separate filter media guide
- > Gasket according to application
- > Inner cage according to application
- > Optional: Quick-release Venturi.
- > Optional: Electrostatic conductive enhancement for ATEX environment

PART NUMBER

Example:

CJXXX XXXX XXX XXW

cartridge type	┌	└	┌	└	┌	└
number/diameter of flange. mm	└		└		└	
height of filter. mm	└				└	
type of filter media	└					
filter media area. mm	└					
technology notes (optional)	└					

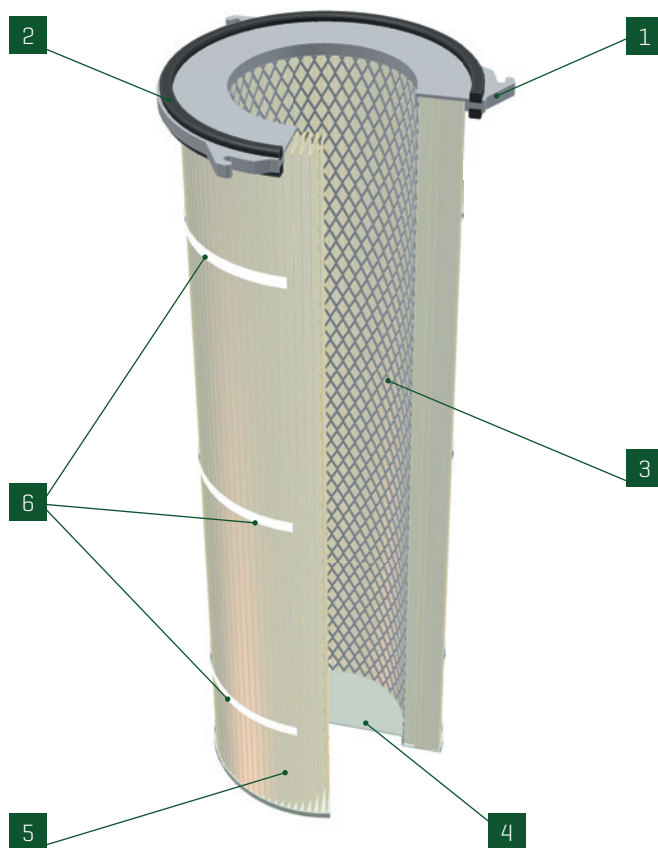

- 1 TOP CAP**
Aluminium
- 2 GASKET**
Standard: EPDM
Alternative: Silicone
- 3 INNER MESH**
Galvanized
- 4 CLOSED BOTTOM CAP**
Standard: Galvanized steel
Alternative: Stainless steel
- 5 FILTER MEDIA**
Can be equipped with Nordic Air Filtration's filter media selection.
- 6 OUTSIDE STRAP**
Optional: Glued or Ultrasonic welding

ACCESSORIES

Venturi nozzle



Top cap can be supplied with/without Venturi lock

JET CARTRIDGE

WITH 3-LUG - OPEN/CLOSE

TYPE **CJ**
3-lug version


DESIGN & DIMENSIONS

TOP CAP




GASKET


GW	GH
14	14 MM



GW	GH
6 MM	12 MM



CARTRIDGE

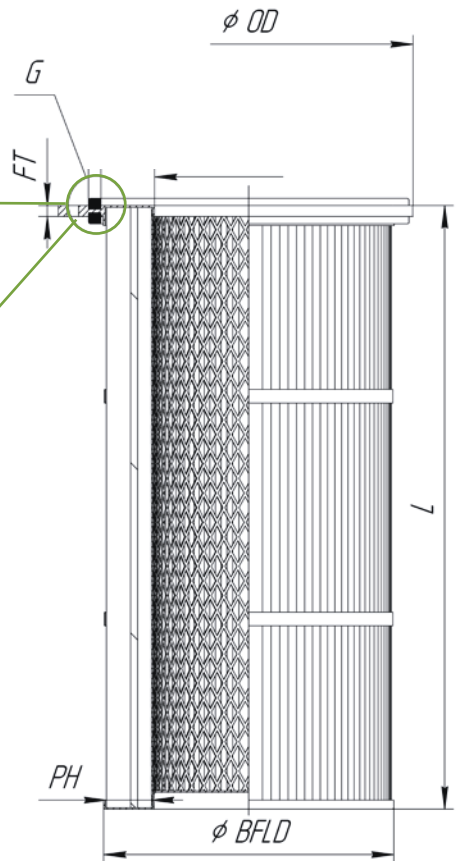

Specifications		Standard dimensions / mm				
		CJ325	CJ324	CJ225	CJ150*	CJ145MIXTOP*
Top cap outer diameter	OD	370	340	246	190	137
Top cap inner diameter	ID	209	209	144	85	56
Top cap max. outer diameter	Dmax	397	370	272	207	153
Lug dimensions	LUG	14	12	14	10	8
Pleat height	PH	48	48	28	28	25
Bottom cap outer diameter	BFLD	325	325	216	156	116
Cartridge length	L	From 300 to 2000				

* No Venturi nozzle available

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie