

Hall Pyke



Dust Filter Cartridges

Din Cartridge

The SMART choice for filtration

DIN CARTRIDGE

OPEN/CLOSED - OPEN/OPEN

TYPE **CD+CDD**
With strap [outer mesh available]


DIRTY SIDE REMOVAL

- > Filter cartridge for dust applications
- > Can be equipped with Nordic Air Filtration's media selection. See our Industrial Filtration media guide
- > Gasket according to application
- > Inner cage according to application
- > Bottom cap: Mounting hole ranging from 6-30 mm
- > Optional: Electrostatic conductive enhancement for ATEX environment

PART NUMBER

Example:

	CD	XXX	XXXX	XXX	XX	W
cartridge type	┌	└	└	└	└	└
number/diameter of flange. mm	┌	└	└	└	└	└
height of filter. mm	┌	└	└	└	└	└
type of filter media	┌	└	└	└	└	└
filter media area m ²	┌	└	└	└	└	└
technology notes (optional)	┌	└	└	└	└	└

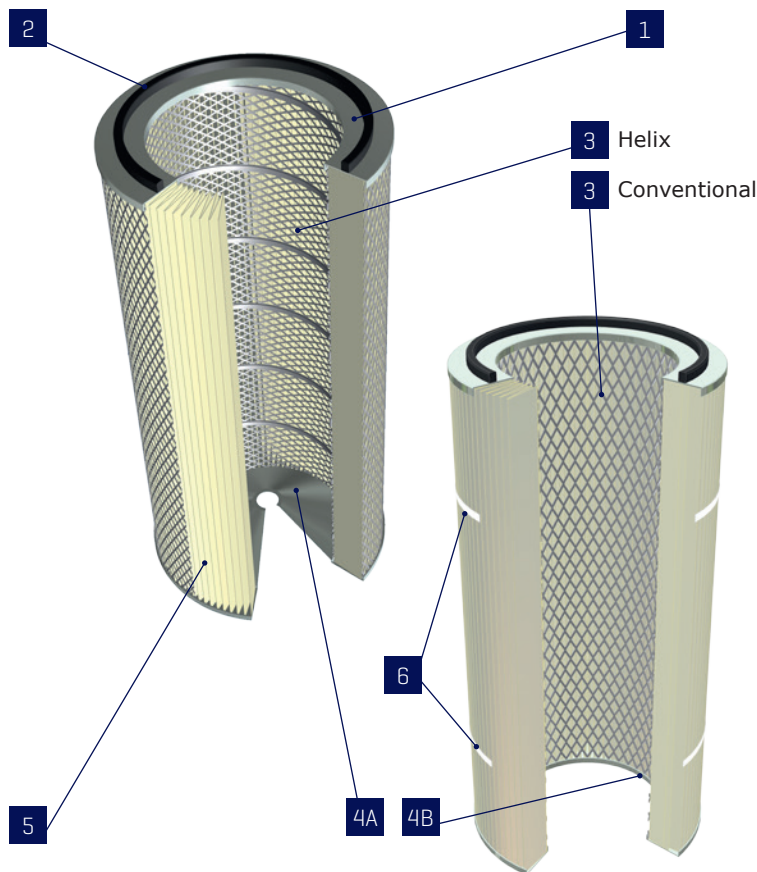

- 1 TOP CAP**
Standard: Galvanized
Alternative: stainless, powder coated or incinerable/recyclable plastic ABS*
- 2 GASKET**
Standard: EPDM
Alternative: Silicone
- 3 INNER MESH**
Standard: Galvanized
Alternative: stainless, powder coated, incinerable /recyclable PP spiro or galvanized helix
- 4A CLOSED BOTTOM CAP**
Standard: Galvanized
Alternative: stainless, powder coated or incinerable /recyclable plastic ABS*
- 4B OPEN BOTTOM CAP**
Standard: Galvanized
Alternative: stainless, powder coated or incinerable /recyclable plastic ABS*
- 5 FILTER MEDIA**
Can be equipped with Nordic Air Filtration's filter media selection.
- 6 OUTSIDE STRAP**
Optional: Glued or Ultrasonic welding

* See CKD/CKDD

DIN CARTRIDGE

OPEN/CLOSED - OPEN/OPEN

TYPE **CD+CDD**
With strap [outer mesh available]

DESIGN & DIMENSIONS


GASKET

CARTRIDGE

GW		GH	
10 MM	0.39"	12 MM	0.50"



GW		GH	
10 MM	0.39"	12 MM	0.50"
14 MM	0.55"	14 MM	0.55"

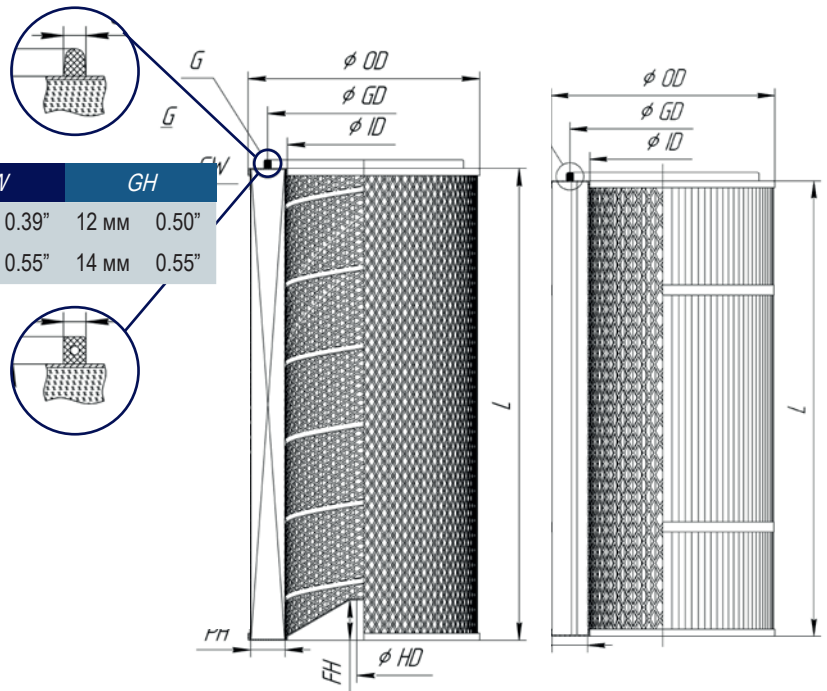

Specifications	Standard dimensions - mm / inches											
	CD560	CD480	CD351	CD325	CD300	CD240	CD228	CD225	CD200	CD156	CD150	
Top cap outer diameter	OD	560/22.05	478/18.40	351/13.82	325/12.80	300/11.81	240/9.45	228/8.98	215/8.46	202/7.95	156/6.14	150/5.91
Top cap inner diameter	ID	460/18.11	368/14.41	241/9.50	215/8.46	190/7.48	130/5.12	147/5.79	145/5.79	115*/4.53	85/3.35	96/3.78
Pleat height	PH	<46/1.81	<48/1.89	<50/1.97	<48/1.89	<48/1.89	<50	<35/1.38	<28/1.10	<40/1.57	<28	<21/0.83
Hole diameter - closed bottom cap	HD	Ranging from: 5 - 30 mm / 0.20 to 1.18 inches										
Cartridge length	L	From: 300 to 2000 / 11.81 to 78.74 inches										

Customized dimensions available.

*Also available with 90 mm / 3.54 inches or 105 mm / 4.13 inches inner diameter

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie