

Hall Pyke



Dust Filter Cartridges

CS Dust Cartridge

The SMART choice for filtration

CS DUST CARTRIDGE

OPEN/CLOSE

TYPE **CS**
Dust Master

CLEAN SIDE REMOVAL


- > Filter cartridge for dust applications
- > Can be equipped with Nordic Air Filtration's media selection. See our separate filter media guide
- > Integrated gasket
- > Outer mesh according to application
- > Optional: Electrostatic conductive enhancement for ATEX environment

PART NUMBER

Example:

CS XXX XXXX XXX XX W

cartridge type	┌	└	┌	└	┌	└	┌	└
number/diameter of flange. mm	└		└		└		└	
height of filter. mm	└				└			
type of filter media	└						└	
filter media area. mm	└							
technology notes (optional)	└							

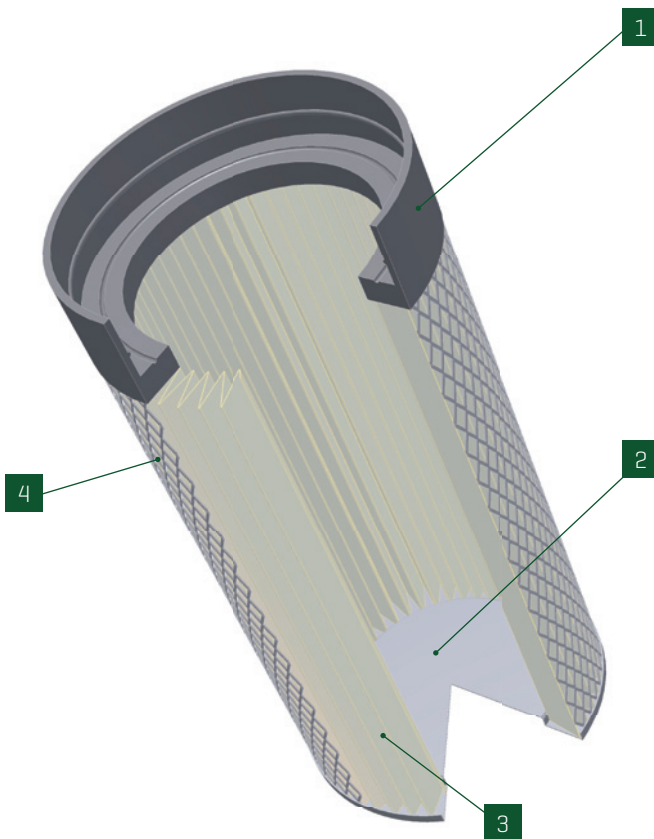

1

TOP CAP

Molded polyurethane (PU) - soft

2

CLOSED BOTTOM CAP

Galvanized
Available with mounting holes

3

FILTER MEDIA

Can be equipped with Nordic Air Filtration's filter media selection.

4

OUTER MESH

Galvanized steel

CS DUST CARTRIDGE

OPEN/CLOSE


TYPE **CS**
Dust Master

DESIGN & DIMENSIONS

TOP CAP



CARTRIDGE

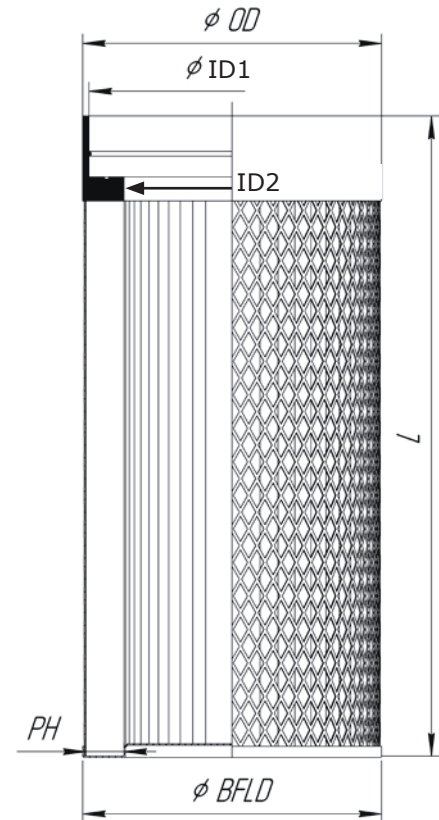

Specifications		Standard dimensions / mm							
		CS600	CS495	CS520	CS478	CS400	CS320	CS280	CS230
Top cap outer diameter	OD	620	515	534	500	410	329	338	245
Top cap inner diameter	ID1	597	487	514	480	395	317	270	230
Top cap inner diameter	ID2	505	400	400	395	317	237	242	162
Bottom cap outer diameter	BFLD	600	490	488	488	400	325	325	231
Pleat height	PH	28	28	28	28	28	28	28	28
Cartridge length	L	From 500 to 1000							

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie