

Hall Pyke



Depth Pre Filtration

MB-PPKP

Melt Blown Filter

The SMART choice for filtration

MB-PPKP Melt Blown Filter

Polypropylene Depth Filtration - Partical Removal

MB-PPKP Filter Cartridges are made of polypropylene non-woven with no surfactants, binders, or adhesives. These filters have long service life and high dirt holding capacity. They are suitable for the water treatment industry.


Features and Benefits

- 100% pure polypropylene depth filter with high dirt holding capacity .
- No wetting agents, solvents, surfactants, or binders, or adhesives .
- Reduce filtration cost
- No fiber-releasing

Typical Applications

- Water Treatment
- Potable Water Filtration
- Cooling Water Systems

Flow Rate Characteristics

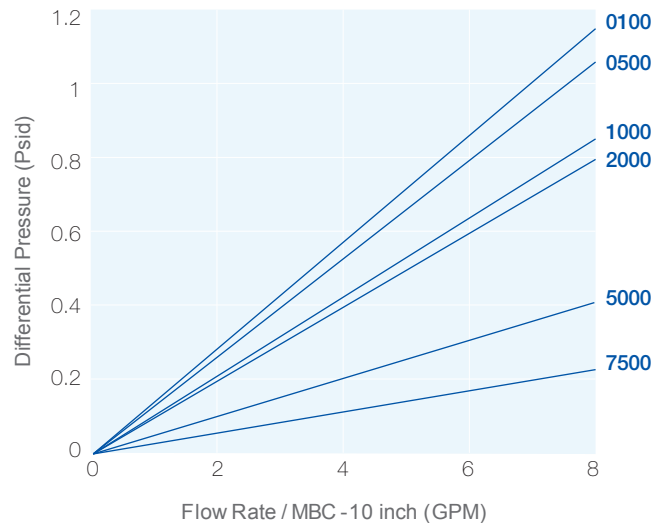

Depth Filtration

Materials of Construction

Filter Media	Polypropylene
Inner Core	Polypropylene
End Caps and Adaptors	Polypropylene
Nominal O.D.	63 mm
Nominal I.D.	28 mm

Operating Conditions

Max. Operating Temperature	60°C
Max. Changeout Differential Pressure	35 psid (2.41 bar)

Ordering Information

MB-PPK	Removal Ratings	End Cap	Nominal Length	Seal Material
	0100=1.0µm	H = PE Gaskets	10 = 10"	S = Silica
	0500=5.0µm	TC = 222 o-ring/flat cap	20 = 20"	E = EPDM
	1000=10 µm	TF = 222 o-ring/fin	30 = 30"	V = Viton
	2000=20 µm	SF = 226 o-ring/fin	40 = 40"	
	5000=50 µm	DOE = Double Open End	50 = 50"	
	7500=75 µm			

Hall Pyke



www.hallpyke.ie

Head Office, 3A Sunbury Industrial Estate, Ballymount Road, Walkinstown, Dublin 12.
T. +353-1-4501411 F. +353-1-4507960 E. info@hallpyke.ie W. www.hallpyke.ie